



Evaluation of modulation formats for 160 Gb/s transmission systems using Raman amplification

Zhenbo, Xu; Rottwitt, Karsten; Jeppesen, Palle

Published in:
Proceedings of IEEE Laser and Electron-Optics Society Annual Meeting

Link to article, DOI:
[10.1109/LEOS.2004.1363388](https://doi.org/10.1109/LEOS.2004.1363388)

Publication date:
2004

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Zhenbo, X., Rottwitt, K., & Jeppesen, P. (2004). Evaluation of modulation formats for 160 Gb/s transmission systems using Raman amplification. In *Proceedings of IEEE Laser and Electron-Optics Society Annual Meeting* (pp. 613-614). IEEE. <https://doi.org/10.1109/LEOS.2004.1363388>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Evaluation of Modulation Formats for 160 Gb/s Transmission Systems Using Raman Amplification

Zhenbo Xu, Karsten Rottwitt, Palle Jeppesen

Research Center COM, Technical University of Denmark, DK-2800 Kgs. Lyngby, Denmark, xuz@com.dtu.dk

Abstract We evaluate 160 Gb/s systems with different modulation formats. RZ-DPSK gives best performance for a single channel system with 40% reach improvement compared to RZ, CSRZ-DPSK is more robust in a WDM system.

Introduction

Recently, 8 channels at 40 Gb/s have been transmitted with a spectral efficiency of 1.6 bit/s/Hz using CSRZ-DQPSK(differential-quadrature-phase-shift-keying) modulation format [1]. Furthermore, 160 channels at 40 Gb/s have been transmitted using CSRZ-DPSK [2]. However, the increased complexity and cost of WDM systems with many channels might make it attractive to increase the channel bit rate from 40 to 160 Gb/s. A 7-channel 160 Gbit/s WDM experiment has been demonstrated using RZ-DPSK [3]. However, to the best of our knowledge, the DPSK modulation format has not been numerically investigated with respect to the transmission performance in 160 Gb/s systems [4]. In this paper we numerically evaluate RZ, RZ-DPSK and CSRZ-DPSK both for 160 Gb/s single channel and WDM systems. In addition, we use Raman amplification to counter balance the intrinsic fiber loss and thereby extend the transmission reach significantly [5].

Format generation and system configuration

An RZ signal of duty cycle 50 % is generated by modulating a CW lightwave on the quadrature point of a Mach Zehnder (MZ) modulator using a voltage swing of $V_{\pi}/2$. The CSRZ signal with a duty cycle of 66 % is generated by modulating the CW lightwave at the minimum point of the MZ with a clock that runs at half the bit rate and full swing of $2V_{\pi}$. The DPSK data generated by the DPSK pre-coder is then applied to a phase modulator (PM), which transfers the data to the CW light. The generated optical DPSK signal is launched into a MZ modulator to carve RZ and CSRZ pulse shapes. As a result RZ-DPSK or CSRZ-DPSK signals are generated. The system configuration is shown in Fig. 1. Each channel is carrying an uncorrelated pseudo random bit sequence. Each CW lightwave has a random initial optical phase to give realistic XPM and FWM interactions between different channels and PMD is ignored. The receiver contains a preamplifier with a noise figure of 4 dB, an optical and an electrical filter. A one bit delay Mach Zehnder interferometer (MZI) for balanced detection [3] is included in the receiver for demodulation of the RZ-DPSK and CSRZ-DPSK formats.

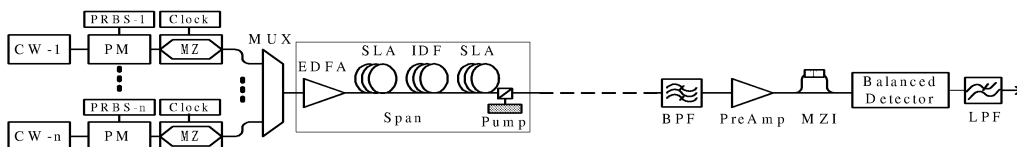


Figure 1. System configuration.

A symmetrical dispersion map configuration is used with a 105 km span length. The span dispersion and dispersion slope are fully compensated by using a 70 km SLA (super large effective area) fiber and a 35 km IDF (inverse dispersion fiber) [5]. The dispersion, dispersion slope and attenuation of the SLA equals 20 ps/nm/km, 0.06 ps/nm²/km and 0.25 dB/km, respectively, while for the IDF these values equal -40 ps/nm/km, -0.12 ps/nm²/km and 0.25 dB/km, respectively. Before each span there is an EDFA with noise figure of 5 dB. A Raman amplifier is backward pumped at a wavelength of 1450 nm; we assume the Raman gain is the same for all channels since the total channel bandwidth is much less than the Raman gain bandwidth. The Raman gain coefficient equals $0.3 \text{ W}^{-1} \cdot \text{km}^{-1}$ and $0.9 \text{ W}^{-1} \cdot \text{km}^{-1}$ for the SLA and IDF, respectively. A pseudorandom bit sequence of length $2^{10} - 1$ is used.

Numerical results

First, we investigate the system performance with respect to the modulation format in a single channel system at 160 Gb/s. In each case the transmission performance is optimized by adjusting the span input power and the Raman pump power for best system performance. In the receiver, a 3rd-order optical Gaussian filter and a 3rd-order electrical Bessel filter is used [5]. The transmission distance as a function of Q value is shown in Fig. 2. It is seen that at $Q=6$ (BER= 10^{-9}) the RZ format has worst performance equivalent to 1600 km. The RZ-DPSK format shows the best performance and allows for an improvement of around 40%, i.e. 2200 km, compared to RZ. And it also allows for

20% longer system reach for the CSRZ-DPSK format. Hence, the combined use of DPSK modulation and balanced detection results in significant Q improvement for fixed transmission distance.

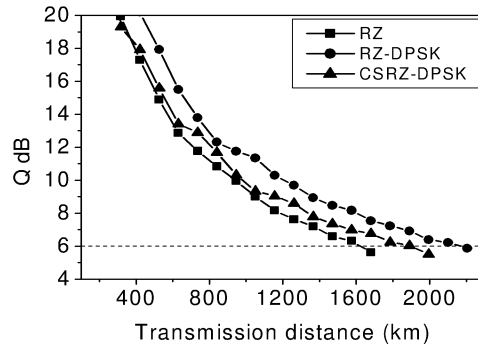


Figure 2. Q vs. transmission distance for single channel systems based on RZ, RZ-DPSK and CSRZ-DPSK.

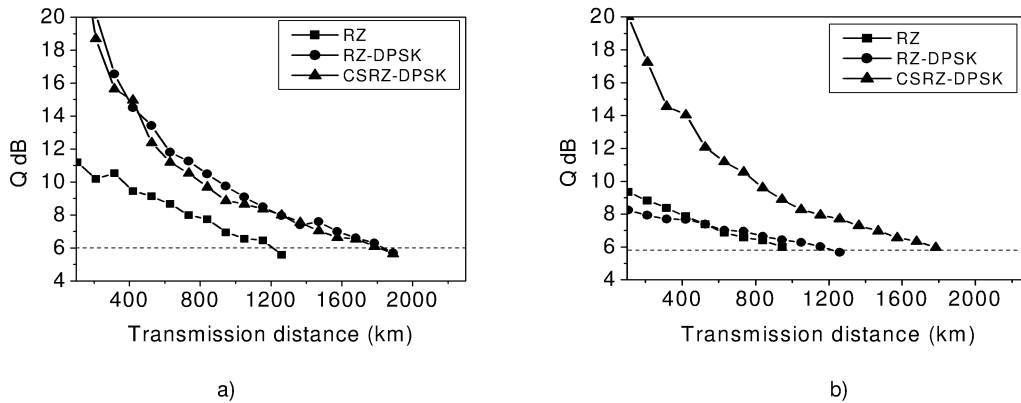


Figure 3. 5-channel WDM systems. a) Spectral efficiency 0.4 bit/s/Hz. b) Spectral efficiency 0.53 bit/s/Hz.

Secondly, we now consider a WDM system, with 5 channels placed on a 400 and 300 GHz frequency grid, equivalent to a spectral efficiency of 0.4 and 0.53 bit/s/Hz. We evaluate the performance of the center channel at 1552 nm, which experiences the most nonlinear effects from adjacent channels. In the receiver, a 6th-order optical Gaussian filter and a 5th-order electrical Bessel filter are used [4]. The transmission distance at $Q=6$ in Fig. 3 are found by using the optimum per-channel signal power and the optimum pump power. Compared to Fig. 2, at spectral efficiency of 0.4 bit/s/Hz, the RZ system reach is reduced from 1600 km to 1200 km, and the system reach of RZ-DPSK is also reduced from 2200 km to 1800 km. While at spectral efficiency of 0.53 bit/s/Hz, RZ and RZ-DPSK drop to 900 km and 1200 km, respectively. This is mainly because of XPM and FWM induced degradation between channels in the WDM system. However, the CSRZ-DPSK is almost unchanged with 1800 km system reach on both spectral efficiencies. Hence, CSRZ-DPSK is more robust to XPM and FWM than the other modulation formats.

Conclusions

Our results show that by comparing a single channel system against a 5 channel WDM system, the RZ-DPSK and CSRZ-DPSK formats show much better performance in WDM systems than RZ. The RZ-DPSK format has superior performance in a single channel system with a system reach of 2200 km, which is a 40% improvement in system reach compared to RZ. When the spectral efficiency is increased, CSRZ-DPSK is found to be more robust towards XPM and FWM in WDM systems compared to other formats.

References

1. Y. Zhu, et al, OFC 2004, paper TuF1.
2. B. Zhu, et al, OFC 2003, paper PD19-1.
3. A. Gnauck, et al, *PTL*, vol. 15 Nov, 2003, pp. 1618-1620.
4. S. Randel, et al, ECOC 2003, paper Mo4.2.6
5. Z. Xu, et al, *IEEE PTL*, vol. 16, Jan. 2004, pp. 329-331.